


DDL-8100eHX

1-needle, Lockstitch Machine with Large Hook





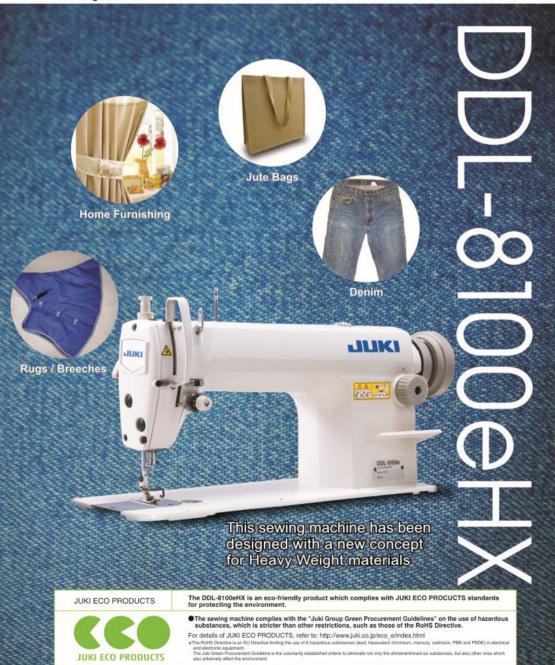





Sewing mechanism that demonstrates outstanding responsiveness to materials to be sewn.

By thoroughly investigating and modifying the sewing mechanisms in order to achieve low-tension sewing, the machine flexibly responds to various kinds of materials and produces beautiful seams of consistent

The machine has been designed for reduced vibration and noise and upgraded reliability and durability.

By adopting a machine frame structure designed to obtain optimal balance and upgrade strength and rigidity the machine runs with reduced

The machine has easy-to operate functions to achieve improved operability.

By providing a presser foot with a higher lift (13mm), a light-touch stitch dial, and other easy-to-operate functions, the burden on the operator is lightened, and productivity is further increased.

The hand pulley has been designed to contain a deep recess to allow the operator to hold the pulley firmly and turn it with ease.





The machine provided as standard with attachment mounting seats.

The machine is provided as standard with extra attachment mounting seats for attachment of new auxiliary parts in the future. The extremely high durability of the seats ensures an extended service with frequent replacement of attachments.

The location of the hinge to prevent the sewing material from being caught by the hinge.

The hinge is located as such so as to prevent the material from being caught by it, thereby improving workability.

■ SPECIFICATIONS

Model name	DDL-8100eHX
Application	Heavy-weight
Max. sewing speed	4,000 sti/min
Max. stitch length	7mm
Needle bar stroke	35mm
Lift of the presser foot	By hand: 5.5mm By knee: 13mm
Needle	DBx1 (#21) #20-#23
Feed dog	3-row
Hook	Automatic-lubricating full-rotary hook
Lubrication	Automatic
Lubricating oil	JUKI MACHINE OIL No. 7 (equivalent to ISO VG7)
Weight of the machine head	26kg

[■] WHEN YOU PLACE ORDERS Please note when placing orders, that the model

name should be written as follows:

Machine head



""sti/min" stands for "Stitches per Minute."











UKI CORPORATION HEAD OFFICE



8 2-11-1, TSURUMAKI, TAMA-SHI, TOKYO 206-8551, JAPAN PHONE: (81) 42-357-2254 FAX: (81) 42-357-2274

* Specifications and appearance are subject to change without prior notice for improvement.

* Read the instruction manual before putting the machine into service to ensure safety.

This catalogue prints with environment-friendly soyink on recycle paper.

